


Dolce & Vita

24x24 Porcelain


mosaic 
Products. Design. Solutions.




88DOLBEI24




88VITBEI24




88DOLGRI24

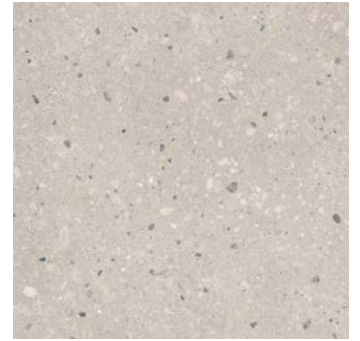

88VITGRI24

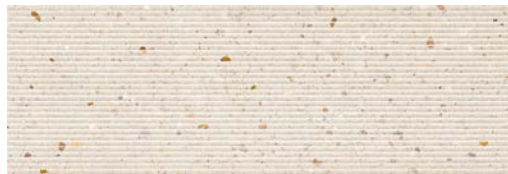

88VITBEI1236S

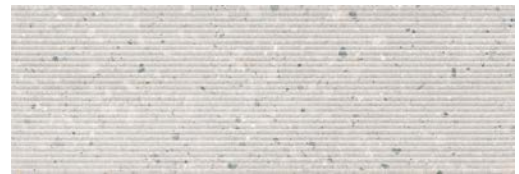

88VITGRI1236S



Tile: 24x24 - 48x48

Wall Tile: 12x36 Suite

Mosaic: N/A

Trim: N/A

For more information
and images:



Technical Characteristics

Test Item	Test Method	Test Result
Water Absorption	ASTM C373	≤ 0.5%
Breaking Strength	ASTM C648	≥ 350 lbf
Scratch Hardness	MOH'S	5
Chemical Resistance	ASTM C650	Class A
Stain Resistance	ASTM C1378	5
Frost Resistance	ASTM C1026	Resistant
Thermal Shock Resistance	ASTM C484	Resistant
PEI - Glazed Tiles	ASTM C1027	4
Minimum Bond Strength (PSI)	ASTM C482	165
Dynamic Coefficient of Friction (DCOF)	ASTM C1028	≤ 0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ASTM C499	Pass
Range of Thickness	ASTM C499	Pass
Warpage	ASTM C485	Pass
Wedging	ASTM C502	Pass
Recycled Content	--	28/%

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 36"	11.81" x 35.43"	10.5 mm	Matte	Yes
24" x 24"	23.62" x 23.62"	9 mm	Matte	Yes
24" x 48"	23.62" x 47.24"	9 mm	Matte	Yes

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.